

Assembly Instructions for #5610 PalWOW

Before assembling your Basic PalWOW, please familiarize yourself with all the parts and check to make sure you have all the parts as listed below.



A & B - The box in which your workstation is delivered contains two smaller boxes. It also contains the workstation base and surface.




C - Interior Box 1 contains five individually wrapped casters (two locking casters and three free wheeling casters) and the center column. Interior Box 2 is an empty filler box.





Step 1.

Insert the center column into the base by placing the pegged portion of the column into the bushing on the base and firmly pushing down to secure the column in place.

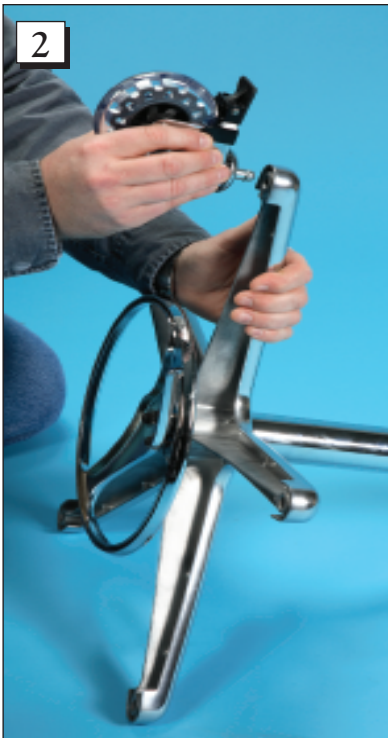

Step 2.

Turn the column and base on their side and push a single caster into each leg of the base. Snap into place.



Completed base.



Step 3.
Remove covering from workstation surface.



Step 4.
Peel off protective edge film.



Step 6.
Position the surface over the center column. The cord cap is in the back and the tapered edge is in the front. Use firm pressure to secure the surface to the column.





To adjust height upward: Push down on the circular foot pedal height adjustment and the surface rises automatically.



To adjust height downward: Push down on the circular foot pedal height adjustment and apply pressure to the surface until the desired position is located and release foot pedal.

If you ordered the Basic PalWOW (#5610), you are now finished with the assembly process.

If you purchased the Complete PalWOW (#5620), you are now ready to add the accessories to your assembled unit.

